




# LED Linear Light

## Feature

Section View

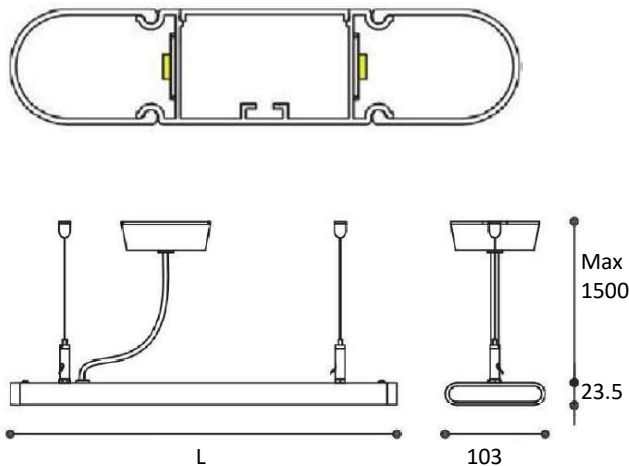

Watt	Power	LED QTY	CRI	MENS(mm)	Colour(K)	Driver	Lumen	PF	Life Time
1200-36W	2x18W	144	≥83	1232x103x23.5	3000/ 4000/ 6000	Inside	3200	≥0.95	50000(h)

Supply with Lifud Brand 0-10V driver with UL-ClassP/FCC approval. Voltage: 100-277V.

## Specification

- Product Dimensions: L1232mm x W 103mm x H 23.5mm**  
Product Dimensions are 1500mm adjustable drop x 1232mm length x 103mm width
- Materials & Construction**  
Materials description is Aluminum alloy & polycarbonate  
Silver anodised, Frosted PC diffuser
- Lamp Source**  
Bulb is 2 x 18W LED module (SMD2835) Cool White, primary bulb colour is Cool White, primary bulb specification is 18W\_SMD2835 Module\_4000K
- Electrical**  
IP40 rated 100-277V voltage, 0-10 dimmable  
LED driver LIFUD brand LF-GDE040THP1000U UL /FCC approval, 100-277V

