




LED RETROFIT DOWN LIGHT

INTEGRATED LED RETROFIT DOWN LIGHT

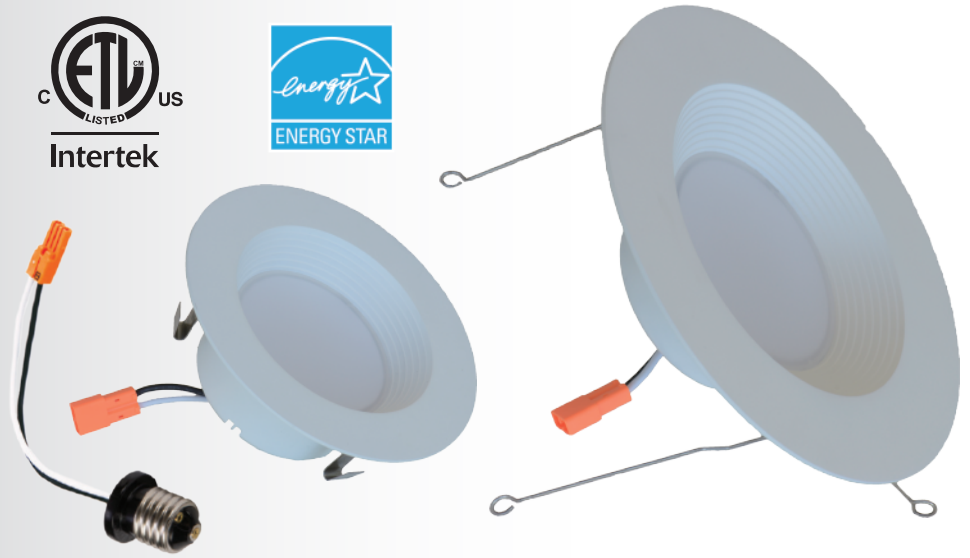


Aecolux's LED retrofit down light is integrated LED chips into one lighting source; suitable for new construction, retrofit or remodel installation, compatible with standard 4", 5" or 6" housing.


Feature

- Regressed lighting diffuser
- Included E26 medium screw-base Edison adapter
- Fully dimmable and suitable for both leading edge and trailing edge dimmers
- Suitable IC application
- Single-color temperature retrofit down light is available in 2700K, 3000K, 4000K and 5000K
- Suitable for damp locations


Installation Accessories

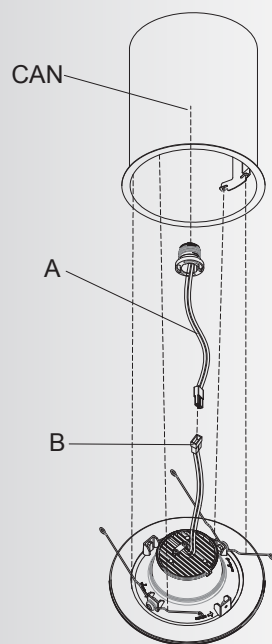


- A. E26 screw-base adapter
- B. Power connector,
- C. Torsion spring
- D. Fixing screws for torsion spring

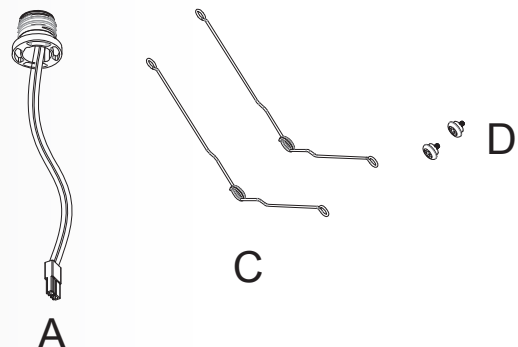

Photometric Data

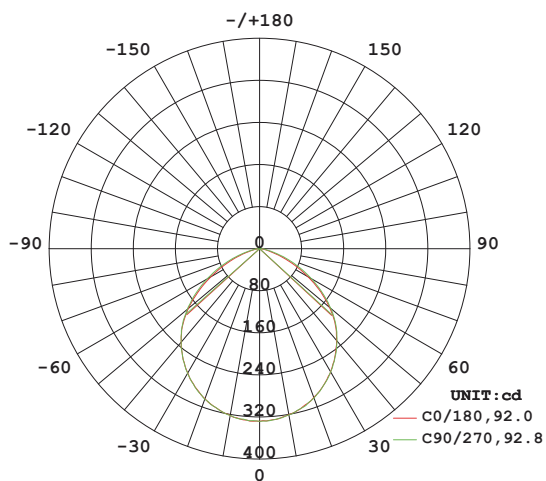


4" 9W

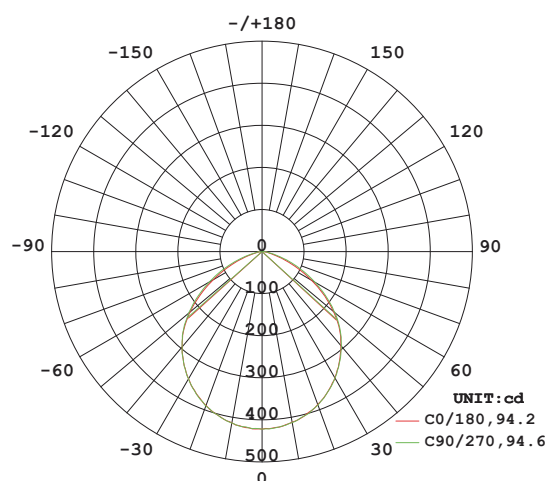


6" 11W

Dimension

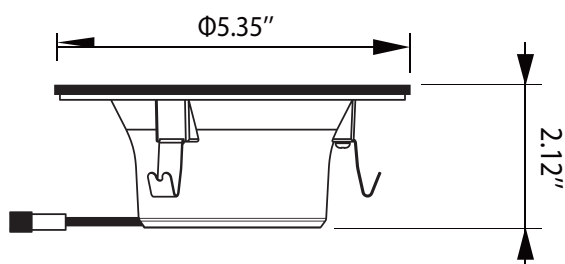

A30010 / A30011 / A30012 / A30013

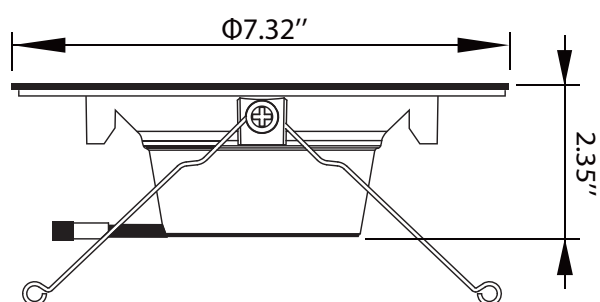

A30020 / A30021 / A30022 / A30023

Specification

Product	Retrofit Down Light							
Model	A30010	A30011	A30012	A30013	A30020	A30021	A30022	A30023
Color Temperature	2700K	3000K	4000K	5000K	2700K	3000K	4000K	6000K
Wattage	9W				11W			
Luminous	650 Lumens				850 Lumens			
Recessed CAN Size	4"				5" or 6"			
Dimension D x H	5.35" x 2.12"				7.32" x 2.35"			
Voltage	120VAC 50/60Hz							
Dimmable	Dimmable							
Diffuser Material	Polycarbonate							
Beam Angle	> 90°							
LED Lifespan	35,000 Hours							
Location	Damp Location							
Housing Material	Plastic							
Lifetime	3 Years							