

BACKLIT MIRROR








31.5" environmental copper free silver mirror with touch swirch on/off control, UL listed electrical controller. LED backlit with color temperature 6000K, it optional for other color temperature or RGB, option for dimmable, date timer, bluetooth.


Feature -

- · Round LED Mirror.
- · Power consumption 24W 120VAC 50/60Hz.
- · Color temperature 6000K, other color temperature on requested.
- · 2100 lumens output.
- · Touch on/off light switch.
- · White Acrylic diffuser.
- · Metal main frame.
- · Life span 50,000 hrs / 5 years.

Installation




There a metal mounting hang on the back back. A electrical control box with AC power cord




Screw on two mounting screws on the wall put on mirror and let mounting screw under the metal hang


Backlit Construction



LED strip backlit construction from side view

Dimensions



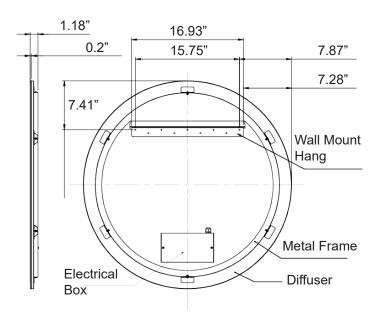

Specification

•	
Product	Backlit Mirror
Model	X00017
Size (Diameter)	31.5"
Voltage	120VAC 60Hz
Wattage	24W
Luminious	2100Lm
Mounting	15.75" mounting hang
Color Temperature	6000K (Other color temperature on request)
Ra	80+
Power Control	Touch switch on/off or Touch switch
Dimmable	Triac dimmable
Life span	50,000 hrs / 5 years
Mirror Thickness	0.196"