



TRI-COLOR CEILING LIGHT

ORION MODERN SLIM LED FLUSH MOUNT




Our new Orion flush mount ceiling light series is a modernized redesign of the classic two-lamp flush mount. A timeless opal diffuser with a polished aluminum trim finish and built-in Tri-Color LED technology.

Feature

- Classic design with updated LED technology
- Tri-Color 3000K / 4000K / 5000K presettable by the installer
- Fully dimmable and suitable for both leading edge and trailing edge dimmers
- A low profile contemporary design
- Trim colors are available in satin nickel, matte black, and vintage brass with frosted glass design like shade is suitable for any home, office, hallway, or stairwell
- The integrated LEDs does not require a bulb


3 CCT Configuration

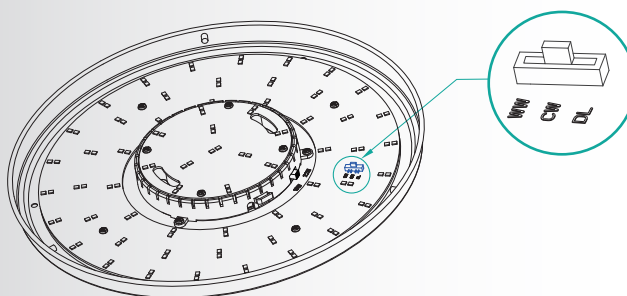


Position	Color
WW	3000K
CW	4000K
DL	5000K

Feature:
Adjustable 3 color
temperatures


Different Trim Finishes



Satin Nickel




Matte Black




Vintage Brass

Ceiling Light Engineering Design

- 1 High quality chrome finishes allow for low light loss opal diffuser
- 2 An isolated LED driver provides a current power supply with added safety protection for the end-user
- 3 Tri-color lighting source technology allows for a low light decay
- 4 The LED extended lifespan is due to the high heat dissipation from the aluminum printed circuit board technology
- 5 Our Metal gear tray design allows for improved heat sink transfer
- 6 Tri-Color setting is easily adjustable with the built-in color configuration jumper switch

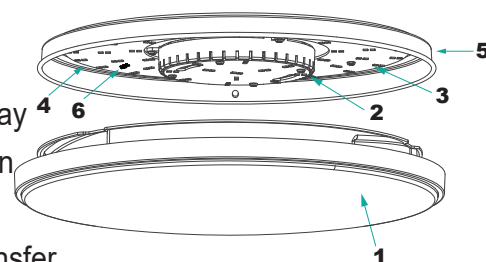

Dimensions

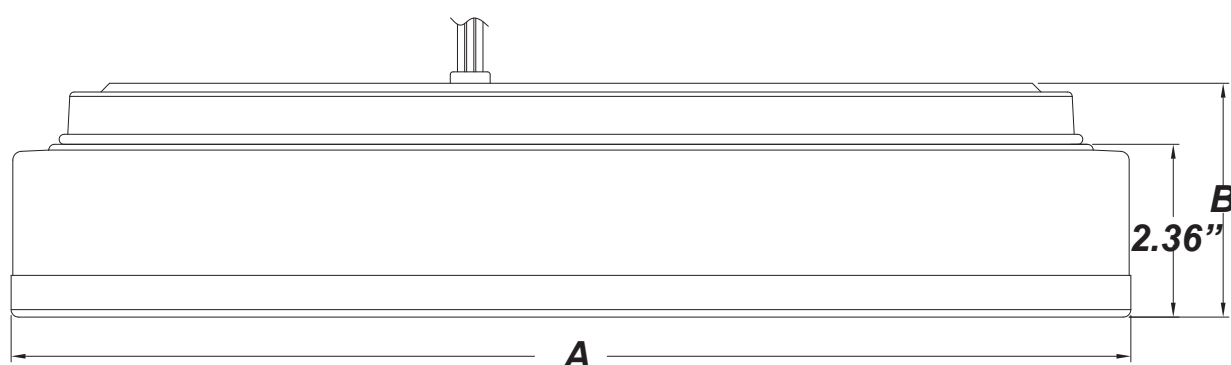

Specifications

Product	Orion Modern Slim LED Flush Mount								
Model	A17081	A17087	A17084	A17082	A17088	A17085	A17083	A17089	A17086
Trim Finished	Satin Nickel	Vintage Brass	Matte Black	Satin Nickel	Vintage Brass	Matte Black	Satin Nickel	Vintage Brass	Matte Black
Size	12"			14"			16"		
Wattage	16W			22W			26W		
Lumen	1320			1780			2450		
Dimension(mm)AXB	Ø11.3 x 3.2"			Ø13.3 x 3.2"			Ø15.3 x 3.2"		
Color Temperature	3000K/4000K/5000K								
Housing colour	White								
Dimmable	Dimmable(Leading Edge or Trailing Edge)								
Voltage	AC 120V/50~60Hz								
Cover	Frosted shade + 3 Clips								
Power Factor	0.95								
Ra	≥80								
Beam angle(50%)	170								
Location	Damp Location								
Lifetime	50,000hrs								