

# TRI-COLOR CEILING LIGHT

ULTRA SLIM LED MODERN FLUSH MOUNT

## Ultra Slim 2.15"




Our unique modern LED Flush Mount Light is the first of its kind. The integrated Tri-Color LED technology allows the flexibility of pre-setting the color temperature and brightness based on your desired preference.

### Feature

- Ultra Slim 2.15" design
- Tri-color 3000K / 4000K / 5000K pre-settable by installer
- Energy Saving mode pre-settable by dual wattage setup
- Fully dimmable and suitable for both leading edge and trailing edge dimmers
- Isolated integrated for constant current power supply
- Chrome finished with frosted shade is suitable for any home, office, hallway, or stairwell
- Integrated LEDs does not require a bulb

### Tri-Color Configuration

Alpenglo Tri-Color LED Ceiling Light is designed for ease of use for any installer to simply pre-set the color temperature during installation. The built-in switch allows for three options: WW/CW/DL (3000k, 4000k, 5000k)

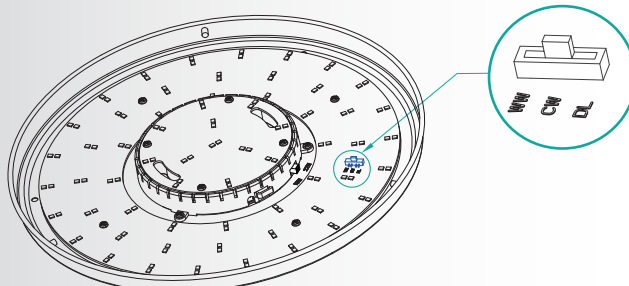

Position	Color
WW	3000K
CW	4000K
DL	5000K

Caution:  
There are 3 colors only


## Energy Saving Mode Setup

Alpenglo Energy Saving Power Mode switch can save up to 20% on electricity consumption.




## Tri-Color Ceiling Light Construction

- 1 High quality chrome finish allows for low light loss opal diffuser
- 2 Isolated LED Driver provides a current power supply with an added safety protection for the end-user
- 3 Tri-Color lighting source technology allows for a low light decay
- 4 The LED extended lifespan is due to the high heat dissipation from the aluminum printed circuit board technology
- 5 Our metal gear tray design allows for improved heat sink transfer
- 6 Tri-Color setting is easy with our color configuration jumper switch

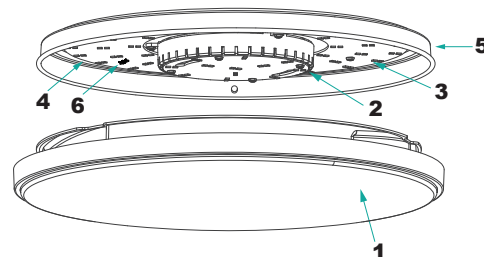

## Dimension

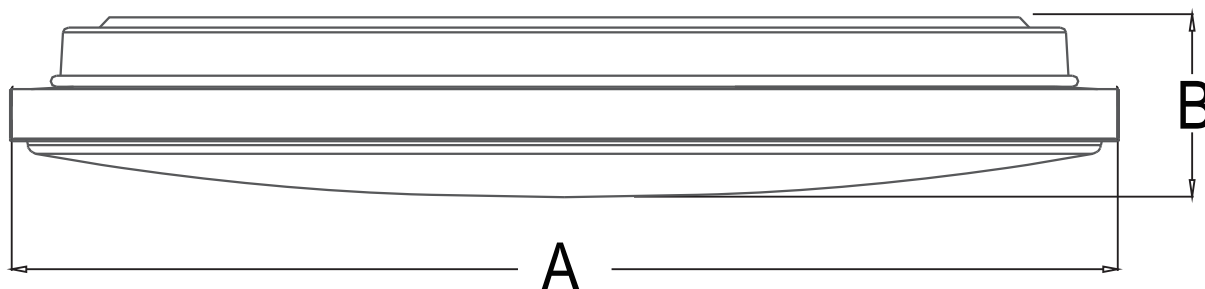

## Specification

Product	Ultra Slim LED Modern Flush Mount				
Model	A17015	A17016	A17017	A17018	A17019
Dimension(mm)AXB	Ø280 x 55	Ø330 x 55	Ø384 x 55	Ø480 x 55	Ø530 x 55
Inch	12"	14"	16"	20"	22"
Wattage	16W/12W	22W/16W	26W/19W	30W/21W	33W/23W
Lumen	1250	1700	2150	2400	2600
Colour Temperature	3000K, 4000K, 5000K Presetable				
Cover	Chrome finished with frosted shade				
Housing colour	White				
Dimmable	Dimmable(Leading Edge or Trailing Edge)				
Voltage	AC 120V/50~60Hz				
Power Factor	0.95				
Ra	≥80				
Beam angle(50%)	170				
LED type	2835				
Location	Damp Location				
Lifetime	50,000hrs				