

# SLIM PANEL

LED SLIM ROUND PANEL 4" or 6"




Alpenglo engineering designed 4"/6" LED Slim Panel lights are ETL certified. They are dimmable and suitable for damp areas. The LED technology makes them energy-efficient with an output of 750 lumens. The aluminum housing ensures heat dissipation.

## Feature


- 4"/6" LED Slim panel, Hole cutting size 4.25"/6" .
- Power Consumption 9W 120VAC 50/60Hz.
- Tri-Color 3CCT 3000K/4000K/5000K selectable.
- 750/1100 lumens output.
- Leading edge or tailing edge dimmable.
- External driver.
- Fully diecasting aluminum body.
- Life span 50,000 hrs / 5 years.

## Installation




### AC Power Wiring

Black wire (Hot)  
White wire (Netural)  
Green wire (Earth)



### Cutting Hole

Hole size :  
4.25" for A30114  
6" for A30124



### Connect DC Power

Connect DC connector  
Turn connector cap

## Mounting Accessories




A51010 4" mounting plate

A51020 6" mounting plate

Pre-mounting plate for 4"/6" LED slim round panel

## Dimension

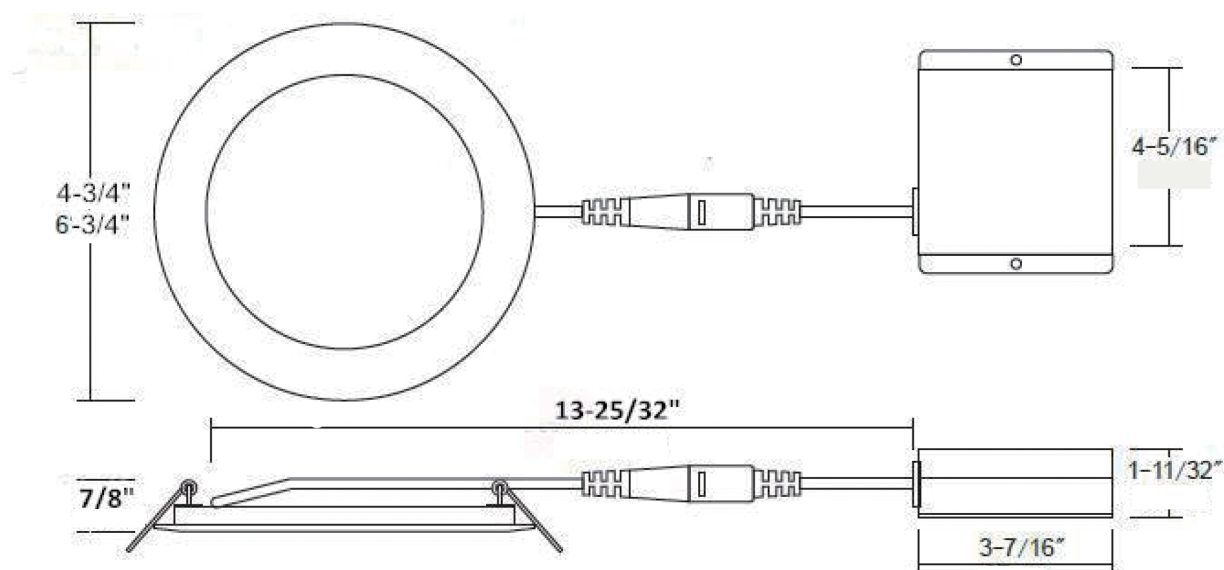

Product	4" / 6" Slim Round Panel	
Model	A30114	A30124
Size	4.75"	6.75"
Voltage	120VAC 60Hz	120VAC 60Hz
Wattage	9W	12W
Luminous	750Lm	1100Lm
Cutting Hole	4.25"	6"
Color Temperature	3000K/4000K/5000K (Selectable)	
Ra	80+	
Beam Angle	120°	
Dimmer Type	Leading Edge / Tailing Edge	
Life span	50,000 hrs / 5 years	
Housing Color	White	